3V-40V Vin, 200mA, Ultra-Low Quiescent Current LDO with Adjustable Output Voltage

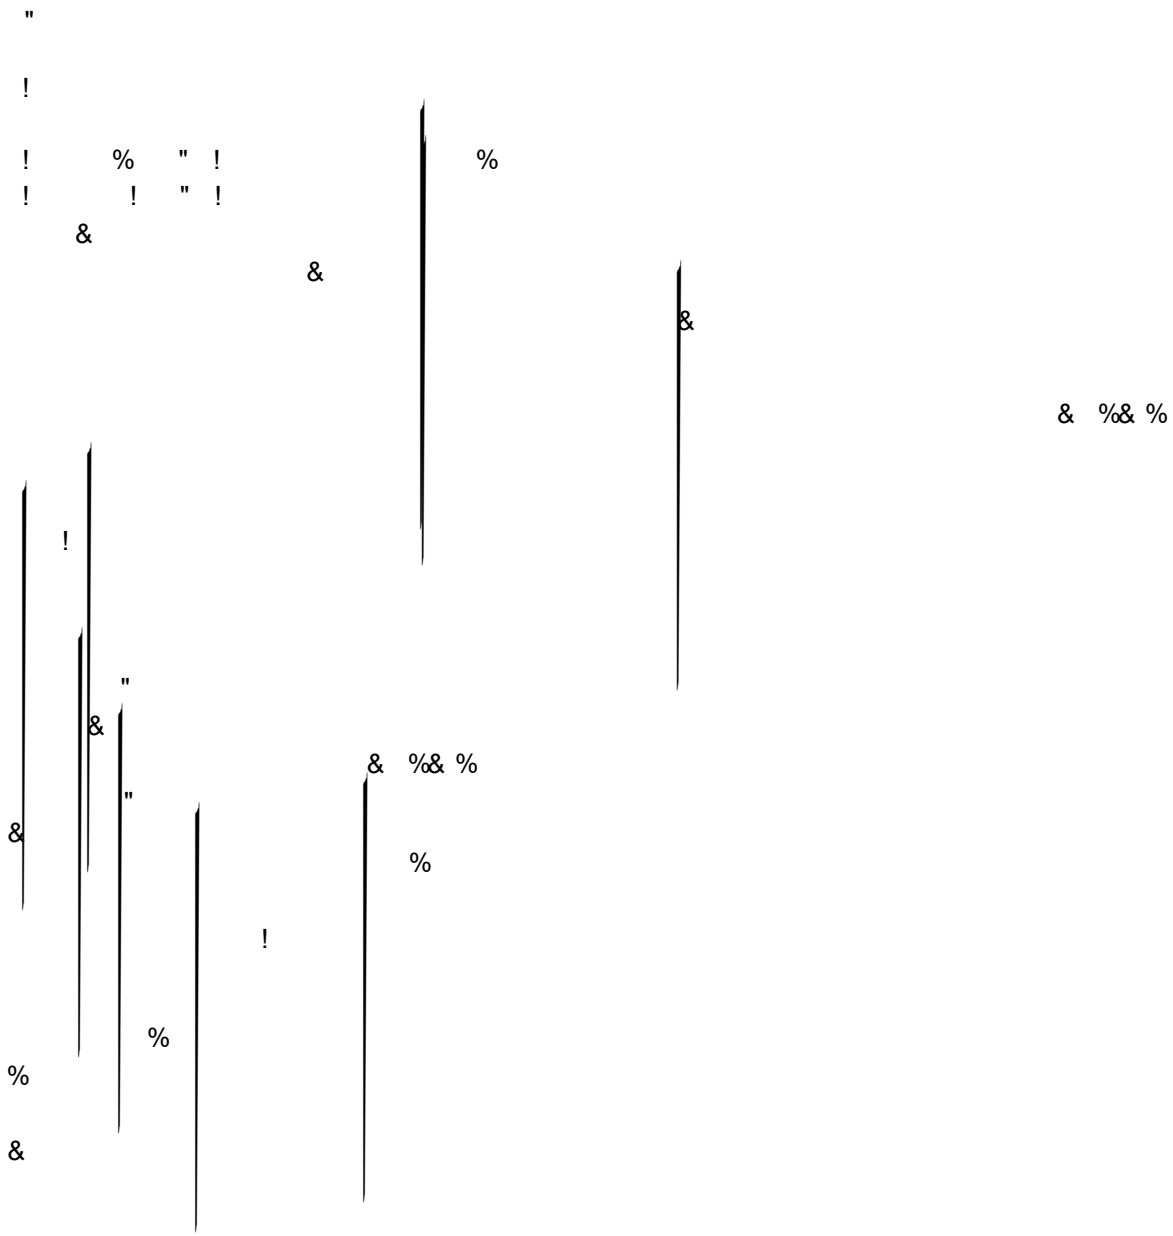

"

Release to production.

Update the ELECTRICAL CHARACTERISTICS.

! " & " ! " & & " ! " " & & %" & &

Orderable Device	O

&

&

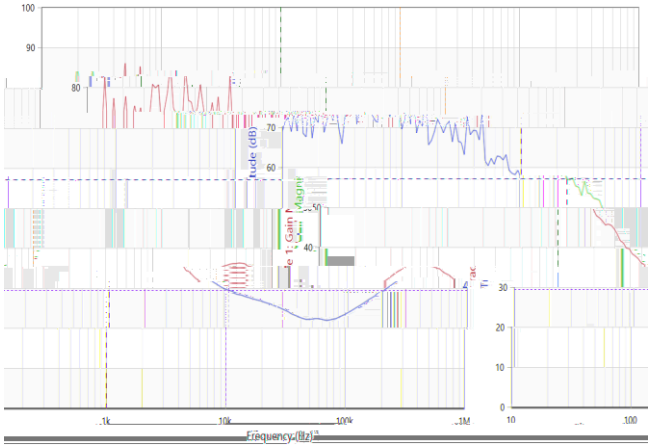

&

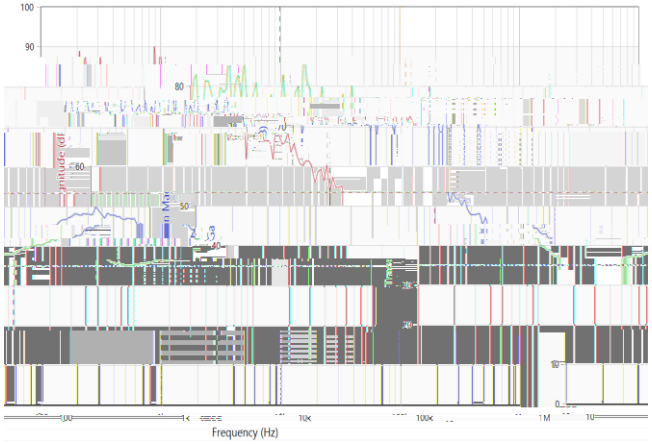

&

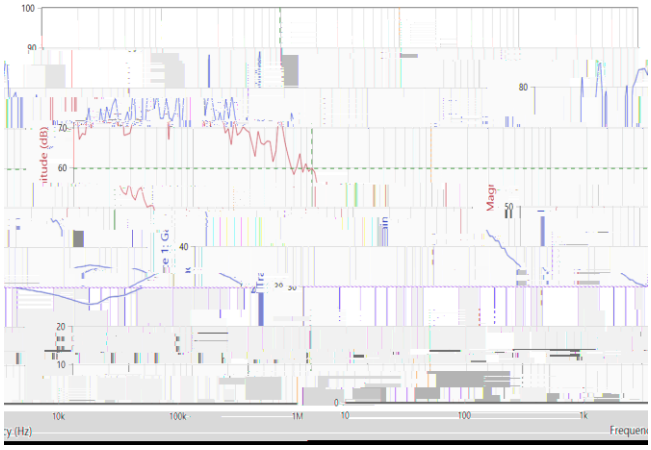

&

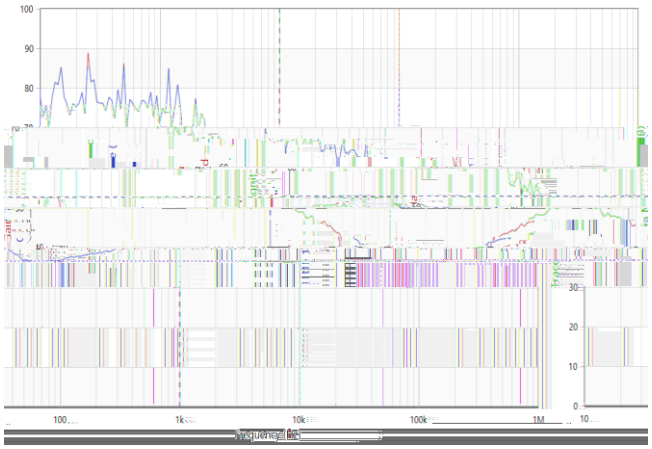

&

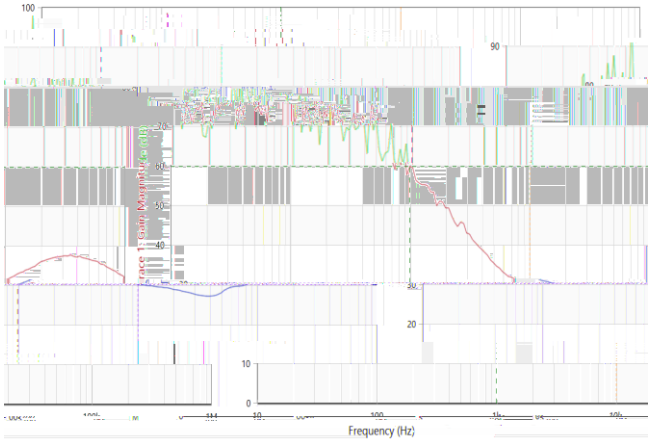

&

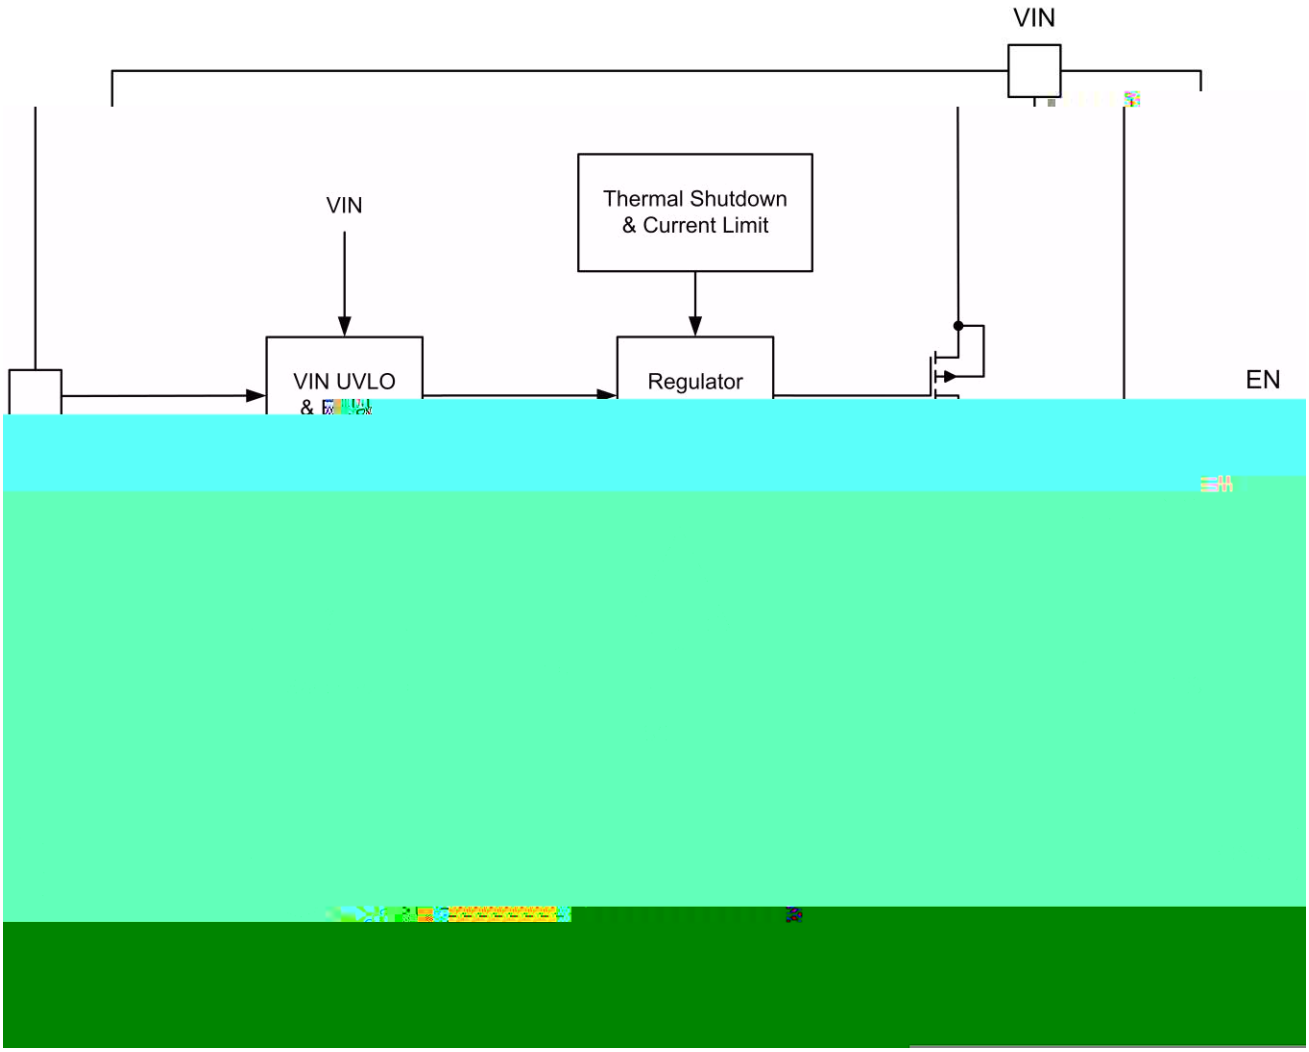
VIN
VIN
Thermal Shutdown
& Current Limit
VIN UVLO
Regulator
EN

!

Overview

!

&

& %& %

The SCT71402Q series products provide adjustable output version which can adjust the output voltage from 1.215V to 25V

&

&

Typical application 1:

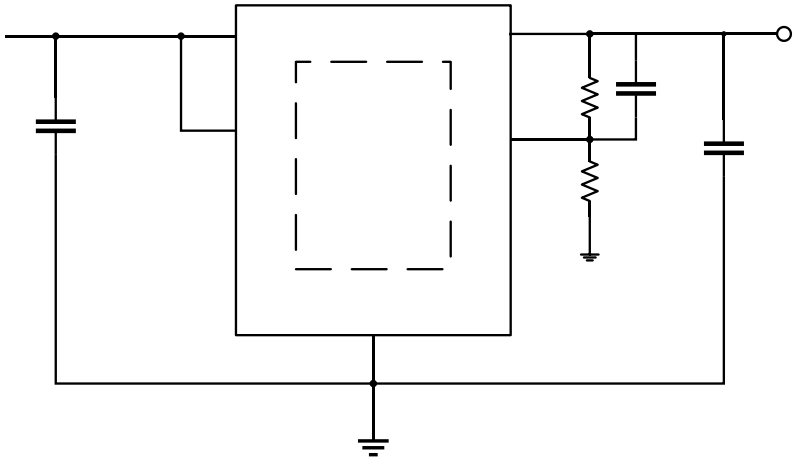

Design Parameters

Design Parameters	Example Value
&	
&	

Typical application 2:

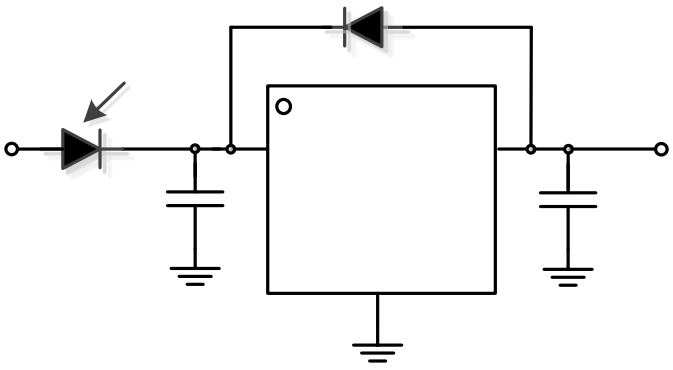

!

Power Dissipation and Thermal Performance

!

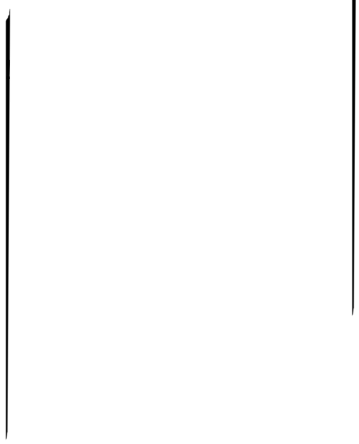

Application Waveforms

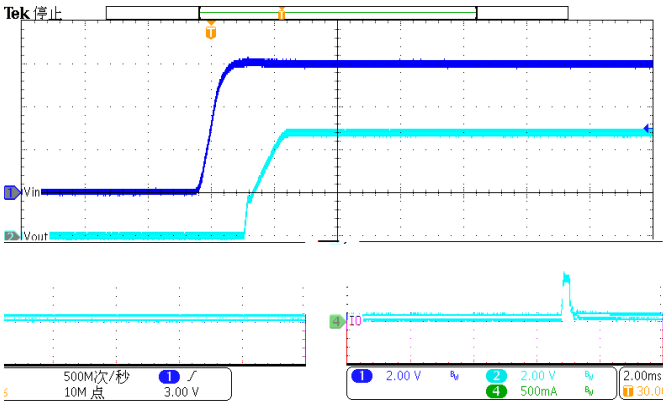

&

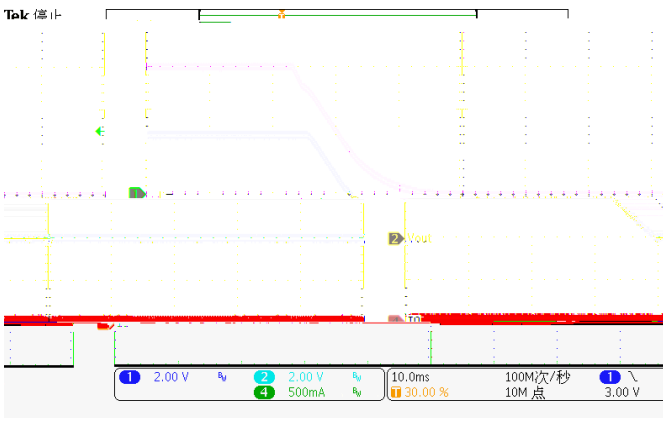

&

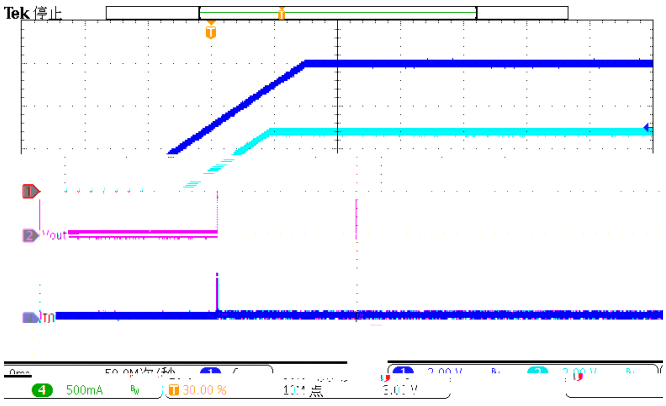

&

&

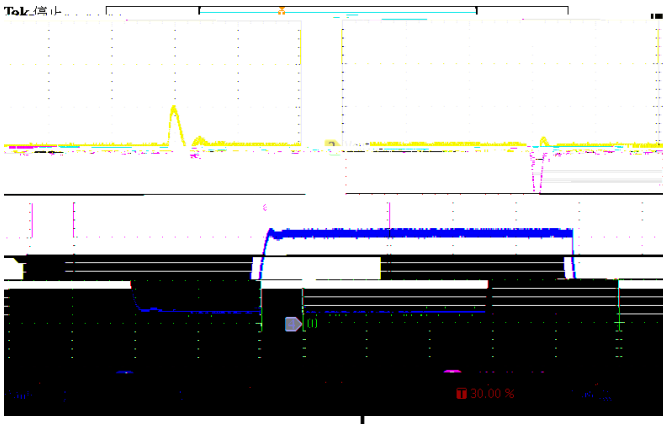

！ ！

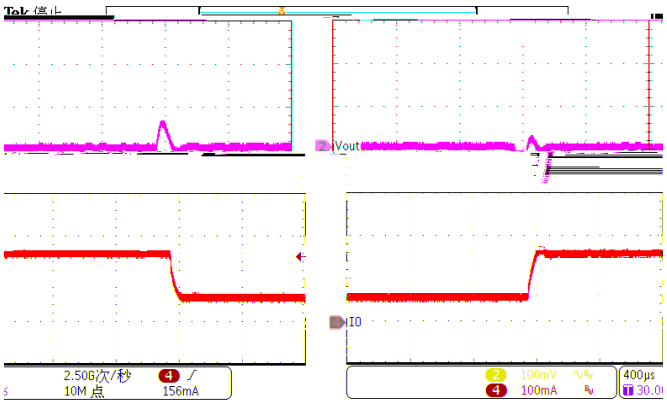

！ ！

Application Waveforms(Continued)

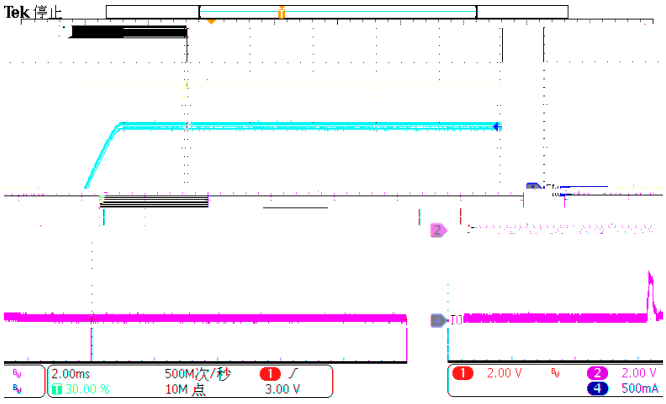

" &

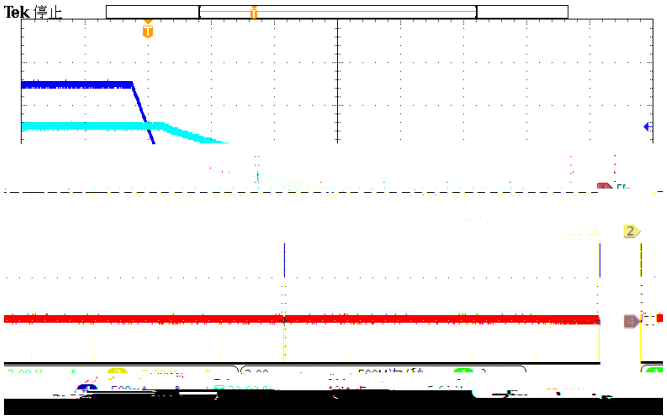

! &

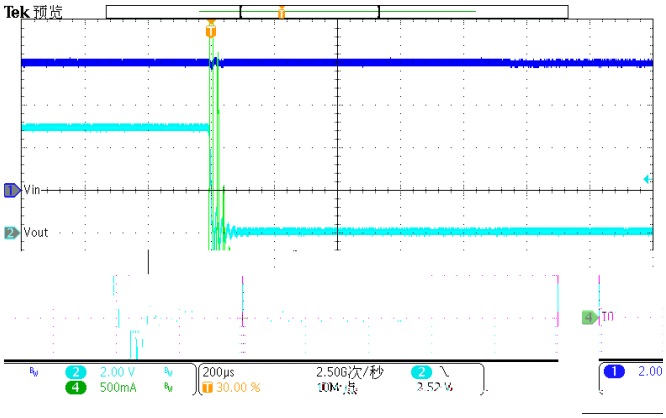

"

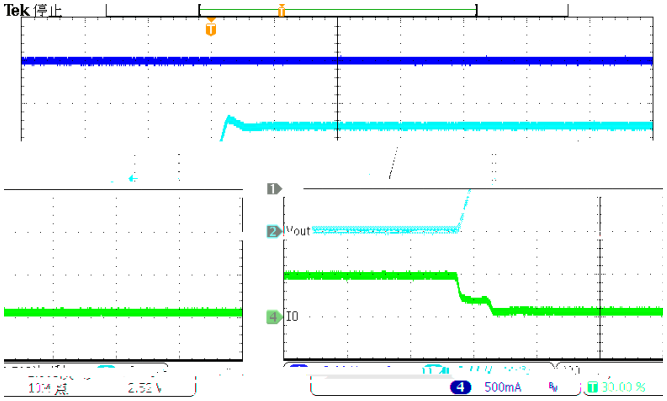

"

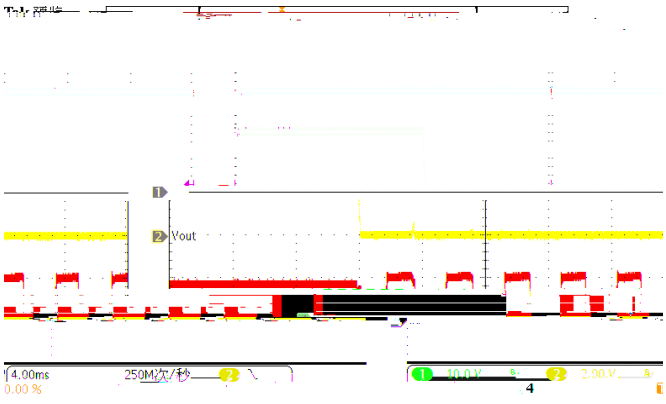

"

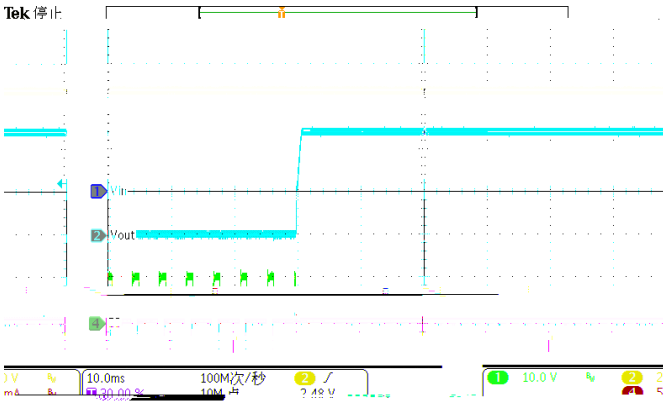

"

Layout Guideline

1.
2. &
   & !
3. & &
4.

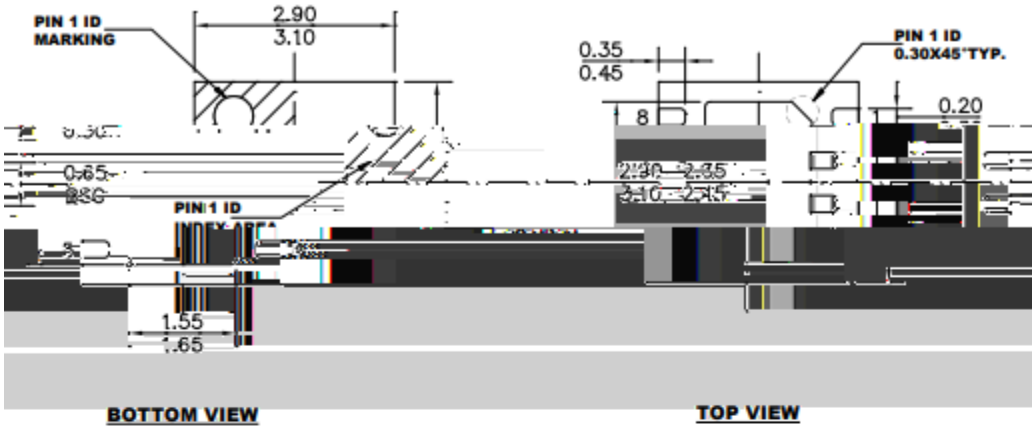



SIDE VIEW

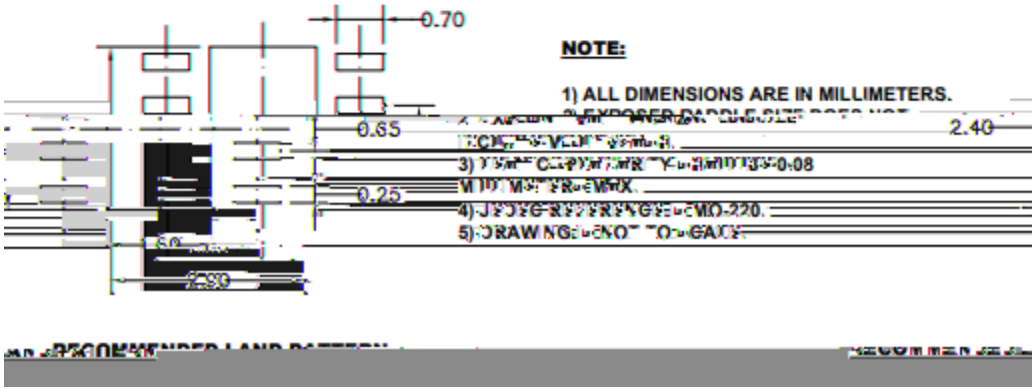

! !

NOTE:

1. ! " ! "
2. !
3.
4.
5. !
6.

NOTICE:

&

!