

FEATURES


REVISION HISTORY

DEVICE ORDER INFORMATION

ABSOLUTE MAXIMUM RATINGS

			0
			0

PIN CONFIGURATION

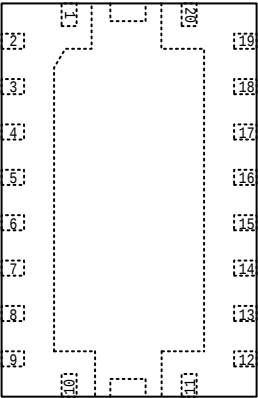



PIN FUNCTIONS



THERMAL INFORMATION


TYPICAL CHARACTERISTICS



FUNCTIONAL BLOCK DIAGRAM




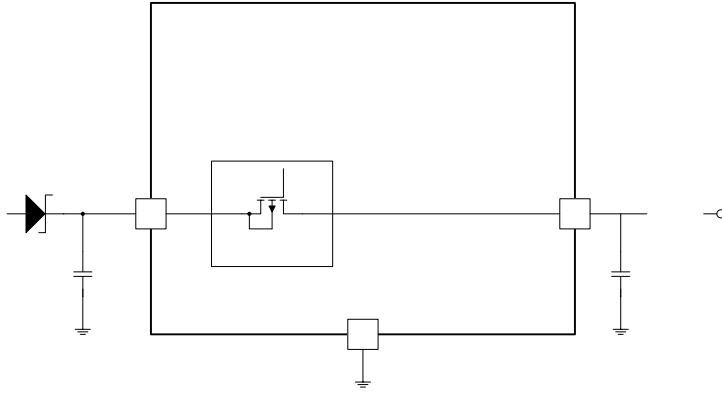

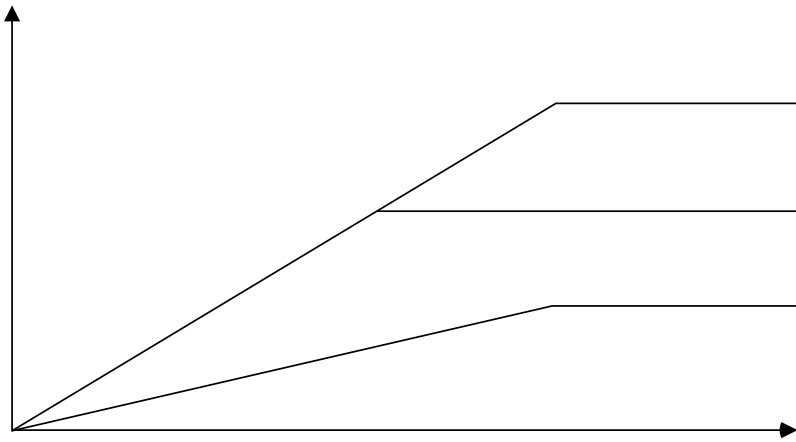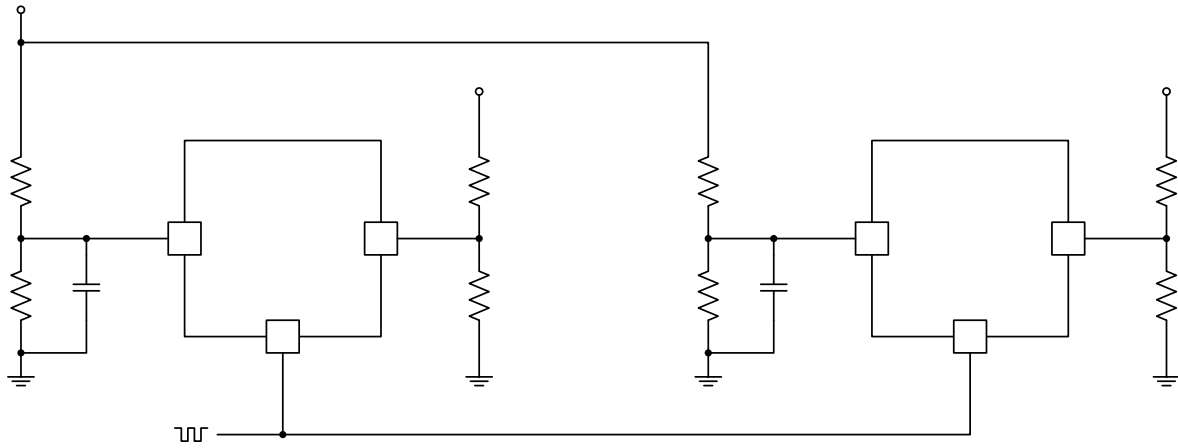


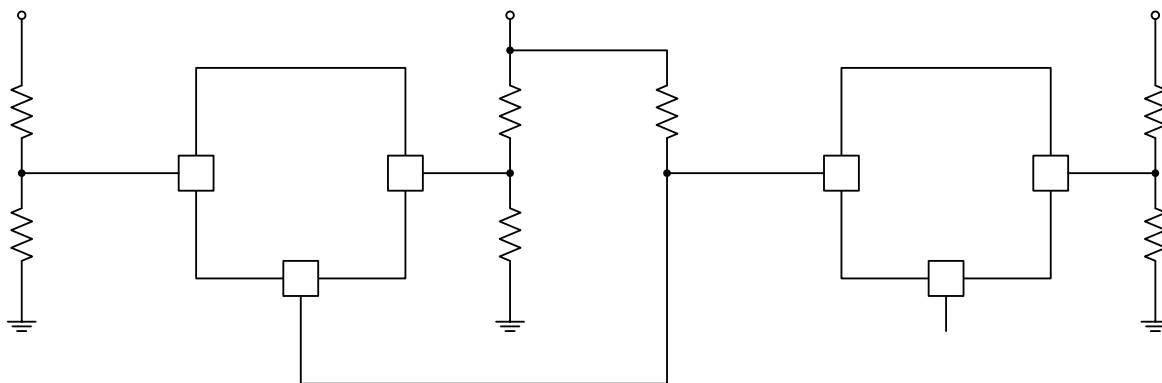

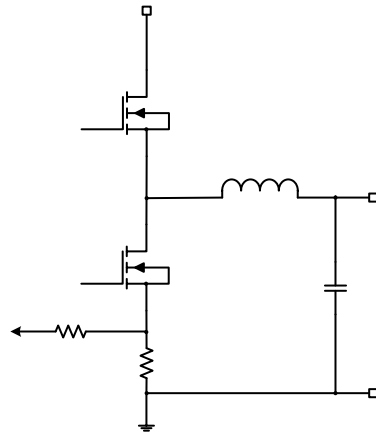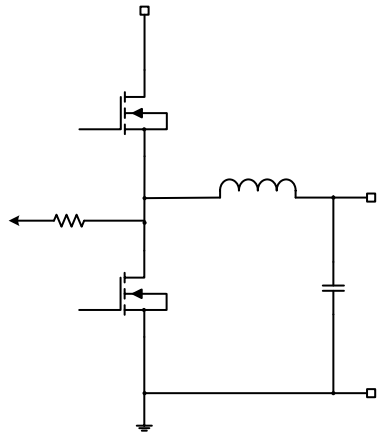






	_____ _____ _____ _____
	_____ _____ _____ _____
	_____ _____






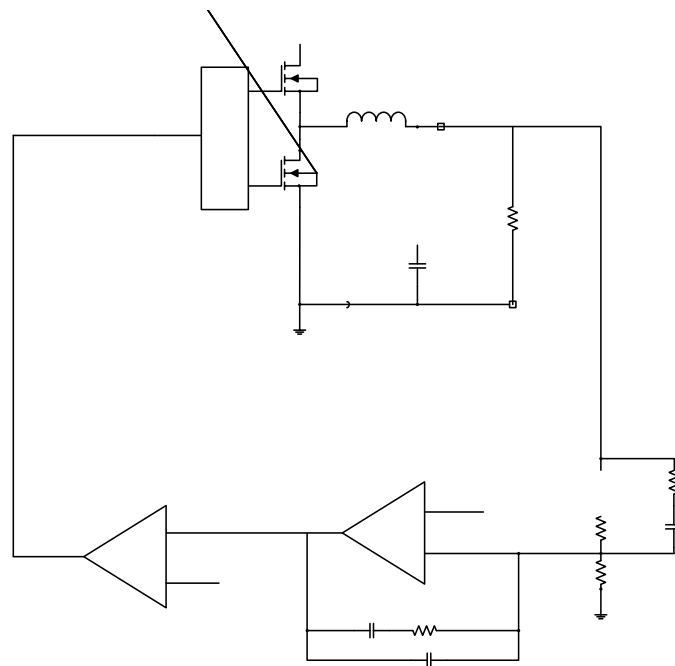








APPLICATION INFORMATION

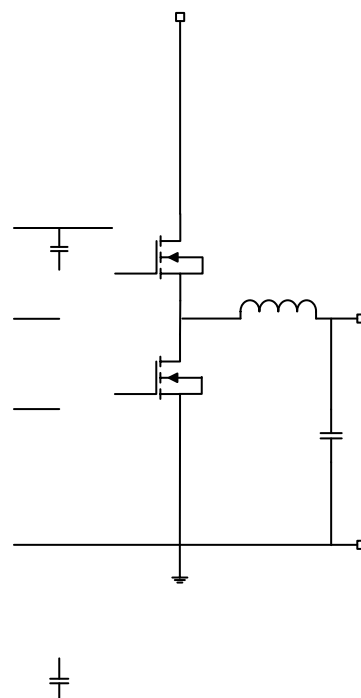

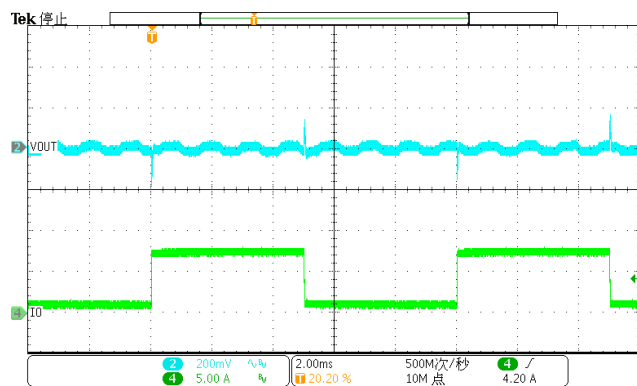


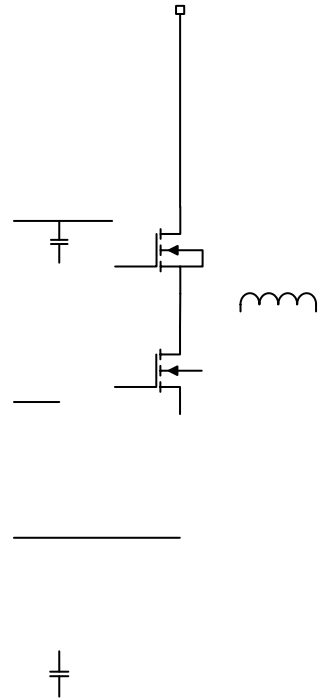

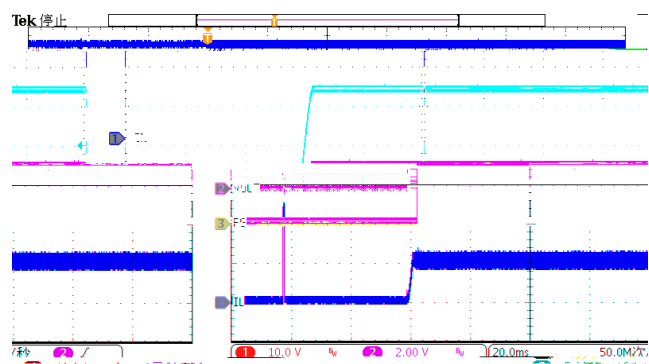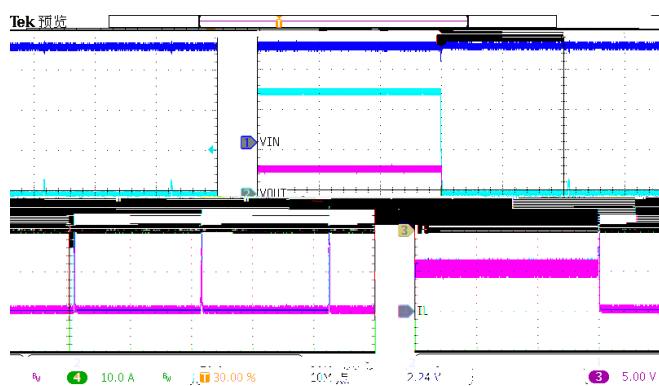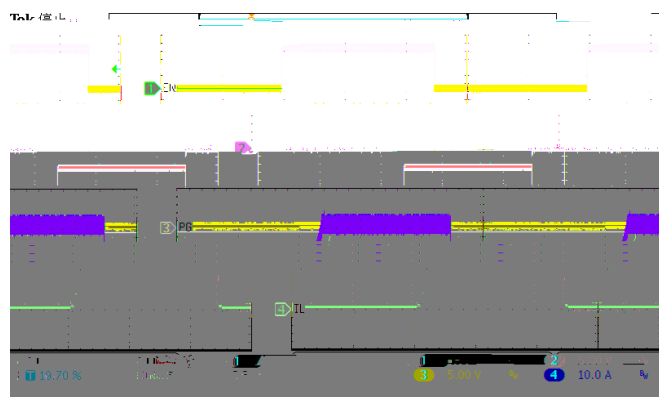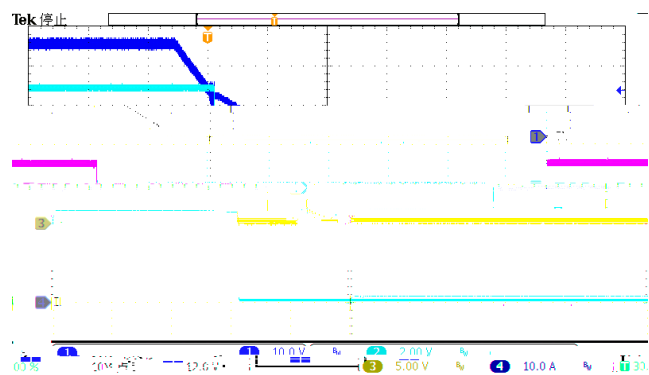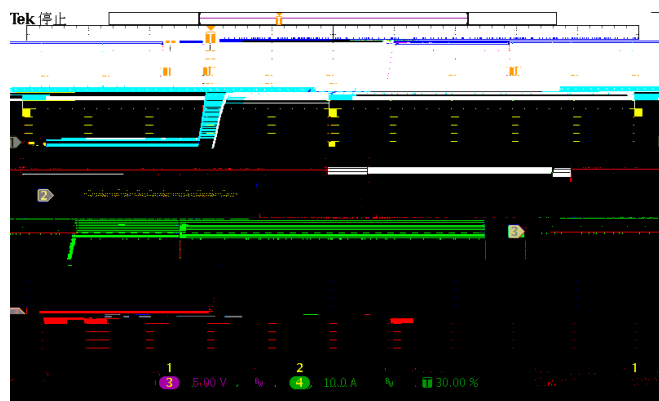

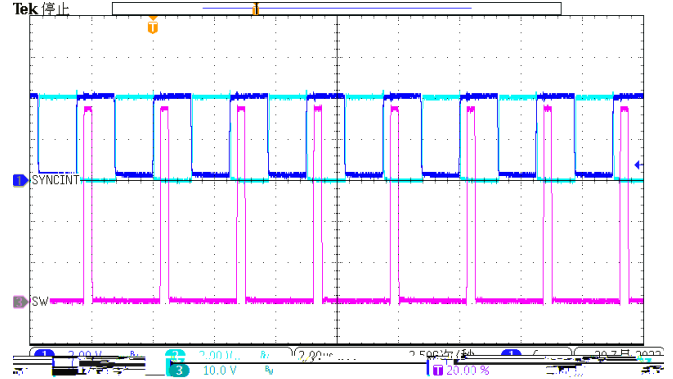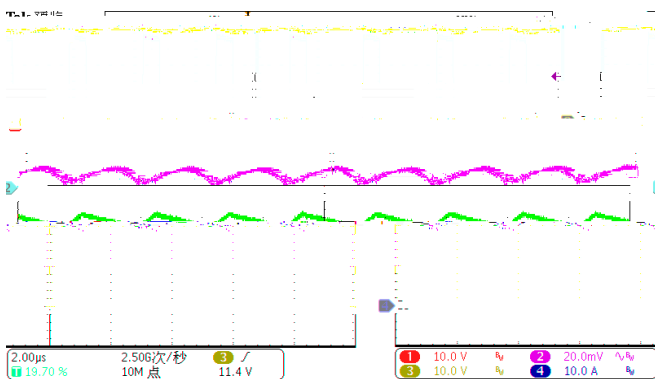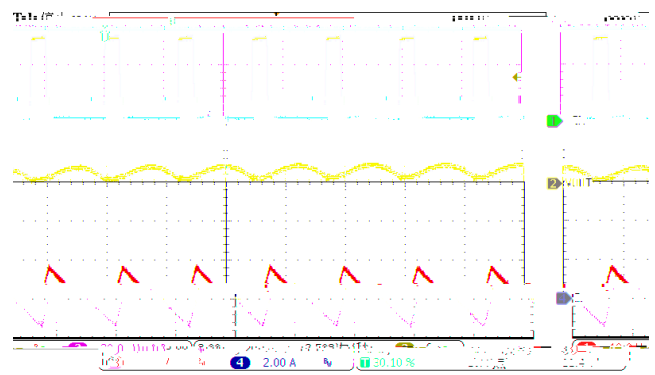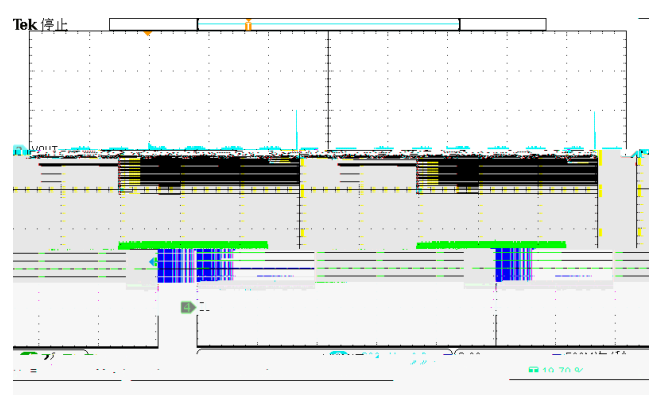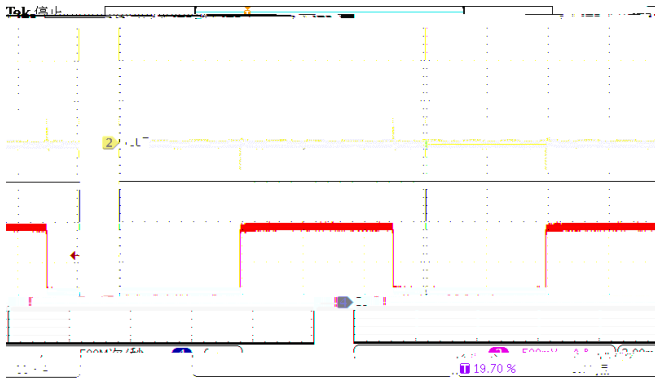

Vout	L	COU	R _{FB}	R _{FB}	R _c	C _c	C _c	R _c	C _c
V	. uH	* uF	. K	. K	. K	nF	pF		. nF
V	. uH	* uF	K	. K	K	. nF	pF		. nF
V	. uH	* uF	. K	. K	. K	. nF	pF		pF

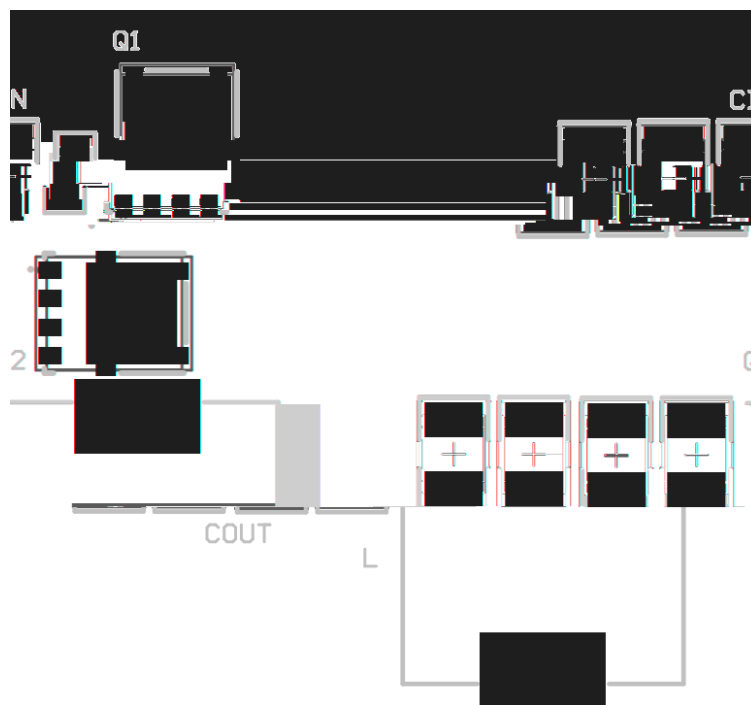



PACKAGE INFORMATION

TYPE AND REEL INFORMATION



