

SCT CONFIDENTIAL

SC

SCTC

SCT CONFIDENTIAL

SCT CONFIDE

SCTCO

SCTC

SCT CONF

SCTCO

Diagnostics Reporting

Version A, ST pins for fault reporting. Pulling down the internal ST device to GND, requires the external pull-up, with conventional values of 3.3V and 5V. When channel malfunctions, the corresponding ST pin will be pulled down to GND, so that the system can quickly detect the faulty channel.

Version B, Diagnose anomalies by checking if the CS pin voltage is VCS_ H .
The fault report is shown in Table 2:

Table 2


T

'H q A

SCT CONFIDENTIAL


SCT CONF

SCT CONFIDE



SCTCO



SCT CONFIDE



SCT CON

SCT CONF

SCTC

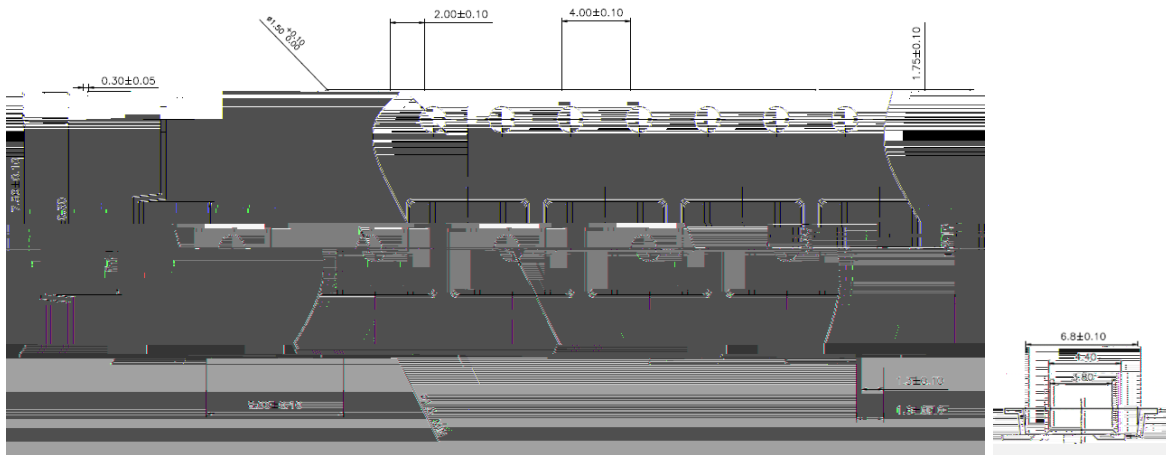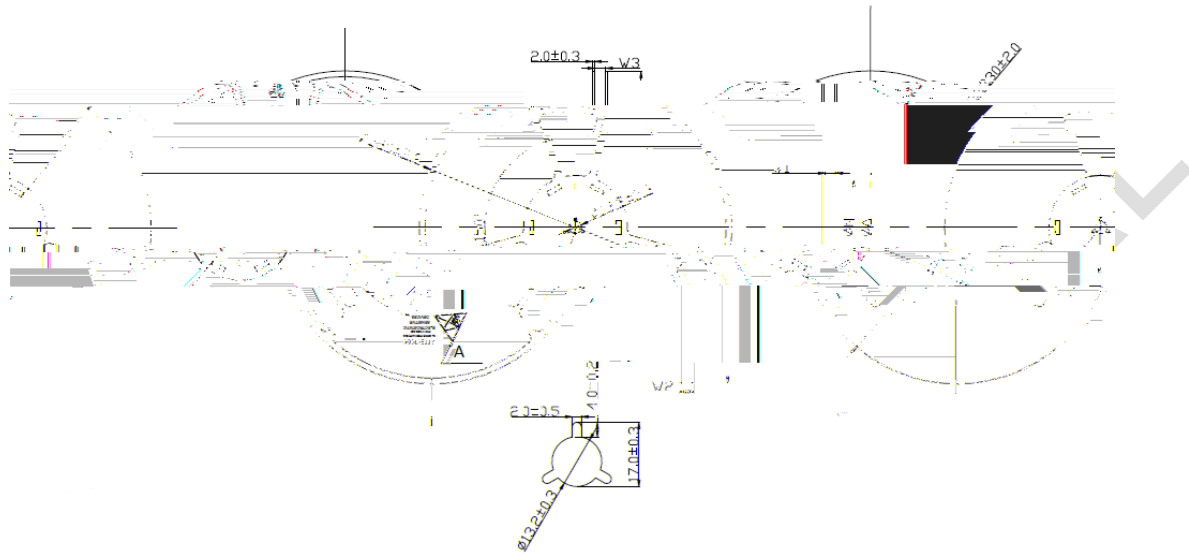

NOTES:

1. 10 socket hole_nitch_cumulative_tolerance_+0.2



TAPE DIMENSIONS

W (mm)	A (mm)	N (mm)	W1 (mm)	W2(Max) (mm)	W3(Max) (mm)
16	330±2.0	100±1.0	16.4±0.5	22.4	15.9/19.4